MT-RJ Series

Connector (One-piece Type)

Features:

-Versatile connector system with a RJ-45 form factor

-Duplex ferrule

-Increases port density required on computer and networking related hardware, panels, wall plates, and in closets by 50%

-Meets TIA-568A standards

Patchcord/ Pigtail

Fiber Diameter:

Singlemode: 9/125 m

Multimode: 50/125 m; 62.5/125 m

Cable/Boot ID (mm):

1.8 (Zipcord cable)

3.0 (Round Duplex Cable)

Insertion Loss: (For MM only)

0.2dB typical

0.75dB maximum

Return Loss: (For MM only)

Min. 20dB

Temp. Range: -40℃ to +75℃

MTRJ Connector

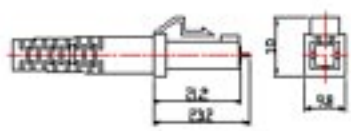

Adaptor

Features

-Perfect Durability for Low Connection Loss

Insertion Loss:

0.2dB typical

0.75dB maximum

Durability:

<0.5dB change after 200 cycles

Alignment Sleeve Material:

Ceramic/ Phosphor Bronze

Temp. Range: -40℃ to +75℃

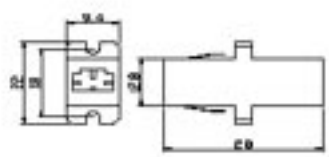

MTRJ Connector